

²³³U BREEDING IN A MODIFIED PROMETHEUS-L IFE REACTOR

Mustafa Übeyli

Gazi Üniversitesi,
Teknik Eğitim Fakültesi, Makine Eğitimi
06500 Teknikokullar, Ankara, Turkey
mubeyli@gazi.edu.tr

Abstract- In this study, neutronic analysis of a hybrid version of the PROMETHEUS-L IFE reactor is investigated by using thorium fuels namely, ThN, ThC₂ and ThF₄. Calculations of neutronic data per DT fusion neutron are performed by using SCALE 4.3 Code. Despite a partial replacement of the tritium breeding zone by the fissile fuel breeding zone, tritium breeding remains still > 1.05, which will be required for a self-sustaining fusion driver. Energy multiplication 1.44 to 1.50 depending on the fuel types in the blanket. Therefore, the investigated reactor can produce substantial electricity *in situ*. Substantial amount of fissile material will be produced at start-up conditions with a fissile fuel breeding rate of ²³³U = 0.154, 0.126 and 0.077 for ThN, ThC₂ and ThF₄ per incident fusion neutron, which correspond to 1858, 1521, 934 kg ²³³U/year, respectively, by a full fusion power of 2807 MW.

Keywords- Hybrid reactor, fissile fuel breeding, thorium.

1. INTRODUCTION

Two systems, main rich neutron sources as fissile fuel producers, have been investigated to produce nuclear fuel required for production of energy in the conventional nuclear reactors and transmutation of nuclear wastes. These are:

- 1) Fusion reactors based on (D,T) or (D,D) reactions,
- 2) Electro-nuclear breeders based on principle of spallation of heavy nucleus under bombardment of relatively high energetic protons (~1 GeV)

The idea of production of abundant fissile fuel by using fusion breeders or electro-nuclear breeders is quite old [1-7]. The studies show that a fusion breeder can produce up to 30 times more fissile fuel than in a FB (Fast Breeder) per unit of energy [1]. Hybrid reactor is a combination of fusion and fission processes that surrounds the fusion plasma with a blanket containing fertile materials (²³²Th and/or ²³⁸U) and lithium for producing fissile fuel and tritium, respectively. Moreover, the fertile materials may also undergo a significant amount of fission and waste actinides can be burnt effectively under highly energetic fusion neutrons. Therefore, fusion energy breeder reactors are alternative by using thorium reserves, natural uranium and spent fuel containing a substantial amount of ²³⁸U for producing fissile fuel and electricity *in situ*, and burn all nuclear waste actinides, such as, ²³⁷Np, ²³⁸Pu, ²⁴⁰Pu, ²⁴¹Am, ²⁴³Am and ²⁴⁴Cm. Many research and development studies have been done on inertial confinement fusion power

reactors. These systems can use fertile fuels and spent fuels without fissile fuel requirement. The blanket concept should be adaptable to most nuclear applications, including the use of natural uranium, LWR (Light Water Reactor) or CANDU (Canada Deuterium-Uranium Reactor) spent fuel or thorium as fertile materials. The capability of the production of fissile fuel in a fusion energy breeder reactor has been studied in earlier works [1,3-6,8-43].

The PROMETHEUS-L (Laser) and PROMETHEUS-H (Heavy Ion) IFE (Inertial Fusion Energy) power plant designs were completed by Department of Energy in USA in early 1992. The PROMETHEUS-L design would use a direct-drive target, driven by a KrF laser, whereas the PROMETHEUS-H design would use an indirect-drive target, driven by 4 GeV lead ions. These two designs are nearly identical from the consideration of target chambers [44]. The PROMETHEUS-L/-H IFE design was strongly based on considerations of safety, reliability, simplicity, and flexibility. Safety considerations led to the choice of a helium-cooled, solid breeder blanket with low activation materials-SiC structure and neutron reflector and Li₂O breeder [45-50]. The blanket also uses SiC structure as reflector, with low-activation Li₂O breeder and He coolant. The tritium inventory in the breeder was minimized. PROMETHEUS uses an innovative, highly-effective shield consisting of Al structure, water coolant, and B₄C, Pb, and SiC absorbers as the shield material instead of concrete for reducing activation [51,52].

2. BLANKET GEOMETRY

The PROMETHEUS IFE uses a thin liquid Pb film supplied from Pb coolant tubes through a porous structure of SiC composite material to protect the first wall. Thickness of film nominally is 0.5 mm that is allowed to form on the surface facing the pellet explosions. The first wall system consists of a series of panels 2-m wide which are lowered into the cavity vertically and locked into a support system attached to the blanket [52]. The blanket of which material compositions and dimensions are given in table 1 contains several rings through the cylindrical and hemispherical sections.

Blanket modules are pre-assembled into the rings, which stack vertically on top of one another. SiC is used to make blanket modules and contains a number of U-bend woven SiC tube sheets inside which the pressurized He coolant flows. The Li₂O that is placed in packed bed form between the tube sheets and is purged by He flowing along the axis of the module, in conjunction with the first wall Pb coolant supplies the potential for adequate tritium breeding without the need for Be as a multiplier. SiC has been selected as the structural material in the first wall and blanket/reflector/plena regions due to the high neutron reflectivity property of carbon. SiC has lower absorption cross-section for neutrons than stainless steels [44].

Table 1. Material composition and dimension of the zones of the blanket

| Zone | Material | Dimension [cm] | Fraction [%] | Material | Density [g/cm ³] |
|-----------------------|-------------------|----------------|-----------------|-------------------|------------------------------|
| Cavity | Vacuum | 450.00 | | He | 0.00715 |
| Pb Film | Pb | 0.05 | 100 | Li ₂ O | 2.013 |
| First Wall | SiC | 0.50 | 90 | SiC | 3.20 |
| | Pb | | 10 | Pb | 11.34 |
| | SiC | 5.00 | 10 | ThN | 9.86 |
| | Pb | | 90 | ThC ₂ | 9.60 |
| | SiC | 0.50 | 100 | ThF ₄ | 6.20 |
| Gap | Vacuum | 3.95 | | | |
| Blanket Wall | SiC | 2.50 | 84 | | |
| | He | | 16 | | |
| Tritium Breeding | Li ₂ O | | 44 ^a | | |
| | SiC | 15.00 | 22 | | |
| | He | | 34 | | |
| Fissile Fuel Breeding | Fuel ^b | | 44 ^c | | |
| | SiC | 12.00 | 22 | | |
| | He | | 34 | | |
| Tritium Breeding | Li ₂ O | | 44 ^a | | |
| | SiC | 33.00 | 22 | | |
| | He | | 34 | | |
| Reflector | SiC | 20.00 | 90 | | |
| | He | | 10 | | |
| Plena | SiC | 17.50 | 10 | | |
| | He | | 90 | | |
| Blanket Wall | SiC | 4.00 | 100 | | |

^a80 % Theoretical density, ^bThN, ThC₂, ThF₄

^c76 % Fuel, 3 % Clad (SiC) and 21 % Coolant (He)

In this study, the tritium breeding zone of PROMETHEUS-H IFE reactor having thickness of 60 cm, is divided into three parts as 15 cm, 12 cm and 33 cm. Then, in order to breed fissile fuel from fertile fuel, FFB (Fissile Fuel Breeding) zone containing fuel spheres filled with compounds of thorium and clad with SiC, is located instead of the second part of the tritium breeding zone having a thickness of 12 cm (see Figure 1). Inner and outer diameters of the fuel spheres are 1.1 and 1.12 cm, respectively and they are arranged as hexagonal in ten rows having pitch length=1.2 cm in radial direction. Different type of fuels namely, ThN, ThC₂, ThF₄, are considered in the FFB to investigate the neutronic performance of the blanket. Helium is used as a coolant and an energy carrier in the FFB.

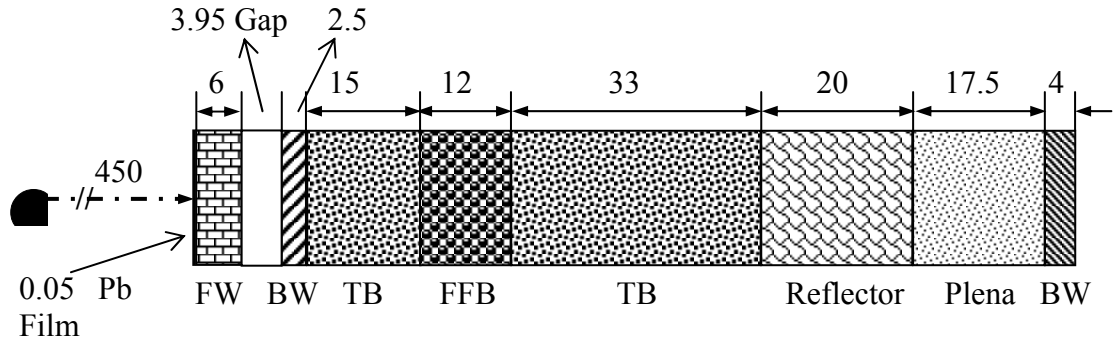


Figure 1. Zones and dimensions in one-dimensional model (FW=First Wall, BW=Blanket Wall, TB=Tritium Breeding, FFB=Fissile Fuel Breeding), (dimensions are given in cm).

3. NUMERICAL RESULTS

3.1. Calculation method

Determination of neutron flux, ϕ , is very important for neutronic calculations. Using Boltzmann transport equation is a common way to calculate neutron flux distribution in a reactor which is given in equation 1.

$$\frac{1}{v} \frac{\partial \phi(r, E, \Omega, t)}{\partial t} = S(r, E, \Omega, t) + \int \int \sum_{E', \Omega'} s(r, E' \rightarrow E, \Omega' \rightarrow \Omega) \phi(r, E, \Omega', t) dE' d\Omega' - \Omega \nabla \phi(r, E, \Omega, t) - \sum_T(r, E) \phi(r, E, \Omega, t) \quad (1)$$

Terms in the first equation for dE and $d\Omega$ around E and Ω , respectively can be defined as follows:

$$\frac{1}{v} \frac{\partial \phi(r, E, \Omega, t) dE d\Omega}{\partial t} = \text{Change of neutron flux in unit time}$$

$S(r, E, \Omega, t)$ = Contribution of source and fission neutrons on neutron flux

$$\left[\int \int \sum_{E', \Omega'} s(r, E' \rightarrow E, \Omega' \rightarrow \Omega) \phi(r, E', \Omega', t) d\Omega' dE' \right] dE d\Omega = \text{Contribution of neutrons on neutron flux due to scattering}$$

$\Omega \nabla \phi(r, E, \Omega, t) dE d\Omega$ = Neutron loss because of convection

$\sum_T(r, E) \phi(r, E, \Omega, t) dE d\Omega$ = Neutron loss due to nuclear reactions between environmental atoms

Neutron transport calculations are conducted with the help of SCALE4.3 System by solving the Boltzmann transport equation with code XSDRNPM [53] in S₈-P₃ approximation with Gaussian quadratures [54] using the 238 groups library, derived from ENDF/B-V [55]. The resonance calculations in the fissionable fuel element cell are performed with

- BONAMI [56] for unresolved resonances and
- NITAWL-II [57] for resolved resonances.

CSAS control module [58] is used to produce the resonance self-shielded weighted cross-sections for XSDRNPM. The numerical output of XSDRNPM is processed with XSCALC [59] to evaluate neutronic performance of the blanket.

3.2. Neutronic performance of the overall blanket

Integral neutronic data per DT fusion neutron in the overall investigated blanket for different fuel types are given in table 2. The energy multiplication factor, M, is defined as the ratio of the total energy release in the blanket to the incident fusion neutron energy. Total energy release in blanket can be calculated as

$$\text{Total energy release in blanket} = 200 \cdot \Sigma_f + 4.784 \cdot T_6 - 2.467 \cdot T_7 \quad (2)$$

Table 2. Neutronic data per DT fusion neutron in the overall blanket

| | ThN | ThC ₂ | ThF ₄ |
|--------------------------------|--------|------------------|------------------|
| M | 1.50 | 1.48 | 1.44 |
| ²³² Th _γ | 0.154 | 0.1261 | 0.0774 |
| ²³² Th _f | 0.0089 | 0.0072 | 0.0038 |
| vΣ _f | 0.0288 | 0.0232 | 0.01241 |
| T ₆ | 1.12 | 1.15 | 1.17 |
| T ₇ | 0.06 | 0.06 | 0.06 |
| TBR | 1.18 | 1.21 | 1.23 |
| Γ | 1.50 | 1.46 | 1.48 |
| L | 0.0214 | 0.0217 | 0.0199 |

M = Energy Multiplication Ratio [Total Energy Release (MeV)/14.1 MeV+1],

²³²Th_γ = ²³³U Breeding Ratio,

²³²Th_f = ²³²Th(n,f),

vΣ_f = Fission Neutron Breeding Ratio,

T₆ = ⁶Li(n,α)T,

T₇ = ⁷Li(n,n'α)T,

TBR = Tritium Breeding Ratio,

Γ = Peak-to-Average Fission Power Density Ratio,

L = Neutron Leakage

M values are found as 1.50, 1.48, and 1.44 for ThN, ThC₂ and ThF₄, respectively due to the fact that low fission values are reached in the blanket. Figure 2 depicts fission rate per cm³ per (D,T) fusion neutron in the FFB zone for these fuels. The highest fission rate is reached in the blanket fueled with ThN whereas the lowest one is obtained in the blanket fueled with ThF₄. One can see from this figure that fission rates decline sharply in radial direction towards to outer end of the blanket since the fusion neutron energy decreases by deeper penetration in the blanket. The fast neutron fluxes decrease in the radial direction while the lower energy group fluxes increase because they are generated mainly beyond the fuel zone and reflected back. In other words, the neutron flux curves show a variation towards the outer boundary from the harder neutron spectrum shapes to the softer ones.

FFBR (Fissile Fuel Breeding Ratio) per cm³ per DT fusion neutron in the FFB zone of the blanket for three different fuels is shown in figure 3. The ²³³U fissile fuel can be produced from ²³²Th(n,γ). ²³³U breeding capability of ThN fuel is higher than that of either ThC₂ or ThF₄ in the blanket and FFBR values for these fuels decrease towards the outer end of the blanket. Calculations give a fissile fuel breeding rate of 0.154, 0.126 and 0.077 for ThN, ThC₂ and ThF₄, per incident fusion neutron at start-up conditions, which correspond to 1858, 1521, and 934 kg ²³³U/year, respectively, by a full fusion power of 2807 MW. However, previous long-term plant operation calculations on hybrid blankets indicate that this high fissile fuel production rate would decrease rapidly, due to the burn-up of the new fissile fuel *in situ* [29-31]. Therefore, the reduction in fissile fuel breeding can be more than by a factor of 2 after a plant operation of 1 year, respectively [33].

TBR values in the blanket for all type of fuels which are greater than 1.05 means that tritium self-sufficiency is maintained for DT fusion driver in all cases. TBR value changes from ~1.18 to ~1.23 depending on the fuel types. Almost 95 % of tritium is produced from ⁶Li while only 5 % of it is gained from ⁷Li. The maximum reached TBR value is ~1.23 in the blanket fueled with ThF₄.

Peak-to-average fission power density ratio, Γ is a measure of spatial non-uniformly fission energy density that must be reduced to ~1.0 for obtaining a flat fission power density. Γ values are in the ranges of 1.46-1.50 depending on the type of fuels. SiC reflector reduces the neutron leakage out of the blanket drastically due to high reflectivity of carbon so that neutron leakage out of the blanket, L, is quite low in all cases. This value changes from 0.0199 to 0.0217 according to the fuel type.

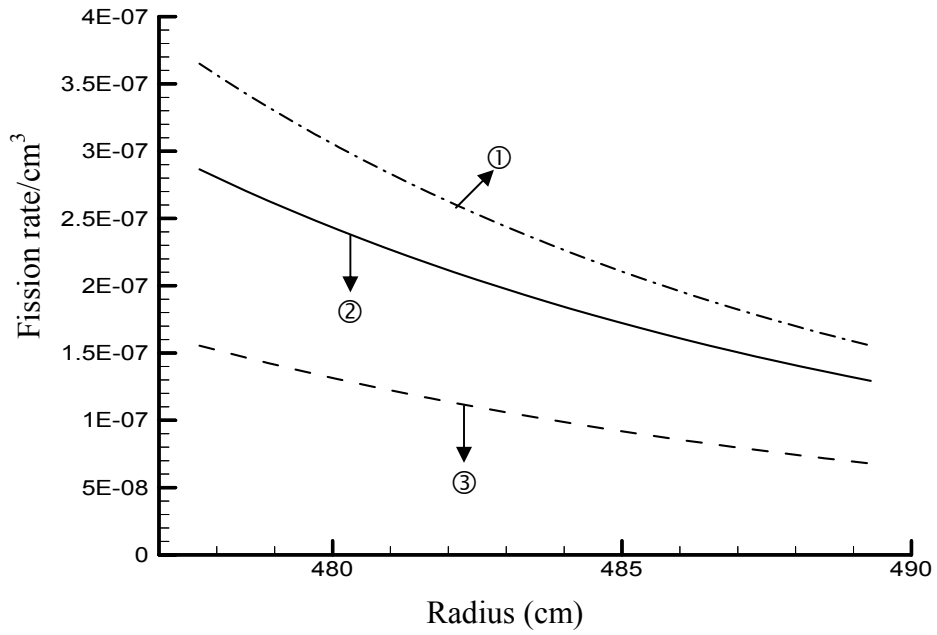


Figure 2. Fission rate per cm³ per (D,T) fusion neutron in the FFB zone for different fuels ① ThN, ② ThC₂, and ③ ThF₄

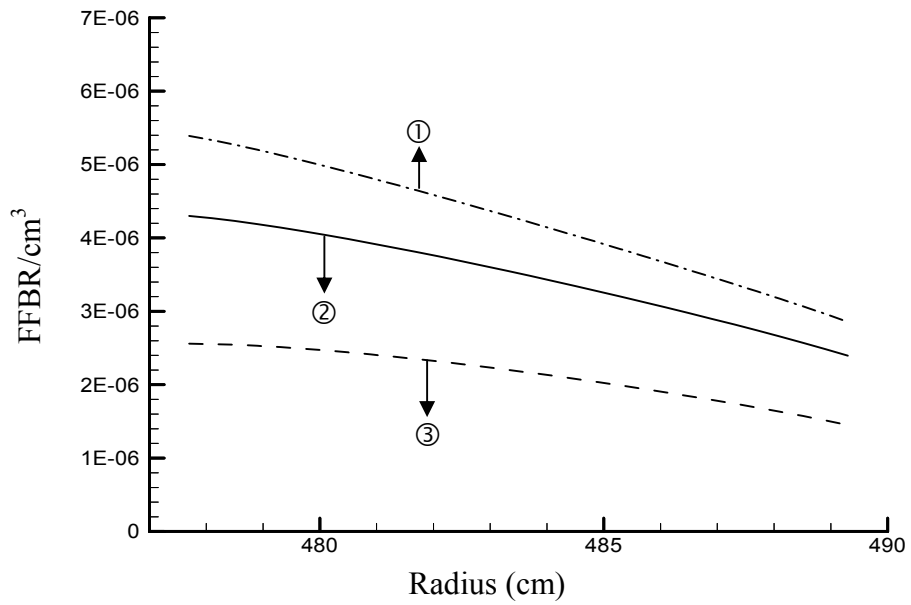


Figure 3. FFBR per cm³ per (D,T) fusion neutron in the FFB zone for fuels, ① ThN, ② ThC₂, and ③ ThF₄

4. CONCLUSIONS AND RECOMMENDATIONS

In this study, the neutronic performance of the PROMETHEUS Fusion Reactor by using different type of fuels that are ThN, ThC₂, and ThF₄ has been investigated. The main conclusions for this study can be cited as follows:

- Substantial amount of ²³³U fissile fuel production is possible by using FFB zone in PROMETHEUS IFE reactor.
- Higher energy multiplication values are reached with respect to pure PROMETHEUS IFE reactor.
- TBR values are greater than 1.05 for these fuels. Therefore tritium production in the blanket is self-sufficient for DT fusion driver.
- Γ values change in the ranges of 1.46 and 1.50 depending on the fuel type due to nonuniform fission density in the FFB zone.

In conclusion, it is recommended that by using different type of thorium fuels, the fissile fuel breeding in PROMETHEUS IFE reactor is possible. For further studies, use of spent fuel and power flattening can be considered.

5. REFERENCES

- [1] D. H. Berwald et al. Fission suppressed hybrid reactor fusion breeder, Lawrence Livermore National Laboratory, UCID-19327, 1982.
- [2] E. Greenspan. *Fusion-Fission Hybrid Reactors*, Advances in Science and Technology, 1984.
- [3] J. D. Lee et al. Feasibility study of a fission-suppressed tandem-mirror hybrid reactor fusion breeder, Lawrence Livermore National Laboratory, CA, UCID-19327, 1982.
- [4] R.W. Moir, Tandem mirror hybrid reactor design study, Annual Report, Lawrence Livermore Laboratory, UCRL-52875, 1979.
- [5] F. R. Mynat, Analysis of acceleration breeder concepts with LMFBR, GCFF and molten salt type blankets, Proc. Information Mtg. Accelerator Breeding, Upton, Jan. 18-19, NewYork, 1977.
- [6] M. H. Raghep et al., Nuclear performance of molten salt fusion-fission symbiotic system for catalyzed D-D and D-T reactors, ORNL-TM-6560, Oak Ridge National Laboratory, 1979.
- [7] E. Teller. *Fusion Magnetic Confinement*, vol.1, part B, Academic Press, 1981.
- [8] D. H. Berwald, R. H. Whitley, J. K. Garner et al., Updated reference design of a liquid metal cooled tandem mirror fusion breeder, *Fusion Technology*, **12**, 30, 1987.
- [9] K. Erickson, N. Y. McCormick, G. L. Woodruff, Power density flattening in fusion-fission hybrid reactors, *Nuclear Technology* **1**, 553, 1981.
- [10] E. Greenspan, A. Misulovin, D. Gilal, Power density flattening in hybrid reactors, *Nuclear Technology* **3**, 485, 1983.
- [11] D.L. Jassby, D. H. Berwald, J. K. Garner et al., Fast-fission tokamak breeder reactors, *Fusion Energy*, **5**, 171, 1986.
- [12] A. Kumar and S. Şahin. Investigation of neutronics of some (D,T) driven experimental thorium hybrid blankets with actinide multipliers, *Journal of Fusion Energy*, **3**, 185-197, 1983.

- [13] J. A. Maniscalco, D. H. Berwald, R.W. Moir, J.D. Lee, E. Teller, The fusion breeder - An early application of nuclear fusion, *Fusion Technology*, **6**, 584, 1984.
- [14] R. W. Moir, The fusion breeder. Submitted to the National Science Foundation Policy Workshop, Washington DC, March 4-5, Lawrence Livermore Laboratory, CA, UCRL-87290, 1982.
- [15] R. W. Moir, Fissile Fuel from fusion in energy and technology review, Lawrence Livermore National Laboratory, CA, UCRL-52000-85-1, 1985.
- [16] R. W. Moir, J. D. Lee, F. J. Fulton et al., Helium-cooled molten salt fusion breeder, Lawrence Livermore National Laboratory, CA, UCID-20153, 1984.
- [17] R. W. Moir, J. D. Lee, W. S. Neef, et al., Feasibility study of a fission-suppressed tokamak fusion breeder, Lawrence Livermore National Laboratory, CA, UCID-20154, 1984.
- [18] R. W. Moir, J. D. Lee, R. C. Maninger et al., Helium-cooled, Flibe breeder, beryllium multiplier blanket, *Fusion Technology*, **8**, 133, 1985.
- [19] R. W. Moir, J. D. Lee, F. J. Fulton et al., Design of a helium-cooled molten salt fusion breeder, *Fusion Technology*, **8**, 465, 1985.
- [20] R. W. Moir, J. D. Lee, Helium-cooled, FLiBe-breeder, beryllium-multiplier blanket for minimars, *Fusion Technology*, **10**, 619, 1986.
- [21] S. Şahin, Power flattening in a hybrid blanket using nuclear waste actinides, *Kerntechnik*, **53**, 285-290, 1989.
- [22] S. Şahin, T. Al-Kusayer, Conceptual design studies of a cylindrical experimental ThO_2 blanket with (D,D) driver, *Kerntechnik*, **47**, 259-266, 1985.
- [23] S. Şahin, T. A. Al-Kusayer, M. Abdul-Raof, Neutronic performance of (deuterium-deuterium) driven experimental thorium hybrid blankets, Transactions of the American Nuclear Society 1985 Annual Meeting, **49**, 102-104, 1985.
- [24] S. Şahin, T. A. Al-Kusayer, M. A. Raof, Preliminary design studies of a cylindrical experimental hybrid blanket with deuterium-tritium driver, *Fusion Technology*, **10**, 84-99, 1986.
- [25] S. Şahin, T. Al-Kusayer, ^{244}Cm as multiplier and breeder in a ThO_2 hybrid blanket driven by a (Deuterium-Tritium) source, *Fusion Technology*, **10**, 1297-1302, 1986.
- [26] S. Şahin, H. Yapıcı, Investigation of the neutronic potential of moderated and fast (D,T) hybrid blankets for rejuvenation of CANDU spent fuel, *Fusion Technology*, **16**, 331-345, 1989.
- [27] S. Şahin, H. Yapıcı, Rejuvenation of CANDU spent fuel in a hybrid blanket, transaction of the American Nuclear Society, **59**, 105-106, 1989.
- [28] S. Şahin, H. Yapıcı, E. Baltacıoğlu, E., T. A. Al-Kusayer, A hybrid reactor design concept driven by cold (D,T) fusion neutrons and fueled with metallic thorium, International Journal of Energy-Environment-Economics, **1**, 167-174, 1991.
- [29] S. Şahin, E. Baltacıoğlu, H. Yapıcı, Potential of a catalysed fusion driven hybrid reactor for the regeneration of CANDU spent fuel, *Fusion Technology*, **20**, 26-39, 1991.
- [30] S. Şahin, H. Yapıcı, E. Baltacıoğlu, Rejuvenation of LWR spent fuel in a catalyzed fusion hybrid blanket, *Kerntechnik*, **59**, 270-277, 1994.
- [31] S. Şahin, H. Yapıcı, Rejuvenation of LWR fuel in fusion blankets, *Annals of Nuclear Energy*, **25**, 1317-1339, 1998.

- [32] S. Şahin, H. Yapıcı, E. Baltacıoğlu, Fusion breeder with enhanced safeguarding capabilities against nuclear weapon proliferation, *Energy Conversion and Management*, **39**, 899-909, 1998.
- [33] S. Şahin, H. Yapıcı, Neutronic Analysis of a thorium fusion breeder with enhanced protection against nuclear weapon proliferation, *Annals of Nuclear Energy*, **26**, 13-27, 1999.
- [34] S. Şahin, H. Yapıcı, M. Bayrak, Spent mixed oxide fuel rejuvenation in fusion breeders, *Fusion and Engineering Design*, **47**, 9-23, 1999.
- [35] S. Şahin, V. Özceyhan, H. Yapıcı, Proliferation hardening and power flattening of a thorium fusion breeder with triple mixed oxide fuel, *Annals of Nuclear Energy*, **28**, 203-223, 2001.
- [36] S. Şahin, H. Yapıcı, N. Şahin, Neutronic performance of proliferation hardened thorium fusion breeders, *Fusion Engineering and Design*, **54**, 63-77, 2001.
- [37] H. Yapıcı, İ. Çürüttü, V. Özceyhan, M. Kirbıyık, Potential of a fusion-fission hybrid reactor using various coolants to breed fissile fuel for LWRs, *Annals of Nuclear Energy*, **26**, 821-832, 1999.
- [38] H. Yapıcı, O. İpek, V. Özceyhan, A. Erişen, Analysis of the rejuvenation performance of hybrid (UN, UC, UO₂, U₃Si₂) and different for various volume fraction, *Annals of Nuclear Energy*, **27**, 279-294, 1999.
- [39] H. Yapıcı, S. O. Akansu, V. Özceyhan, Neutronic Analysis of a moderated (D,T) fusion driven hybrid blanket, *Annals of Nuclear Energy*, **27**, 1237-1244, 2000.
- [40] H. Yapıcı, N. Şahin, M. Bayrak, Investigation of neutronic potential of a moderated (D-T) fusion driven hybrid reactor fueled with thorium to breed fissile fuel for LWRs, *Energy Conversion and Management*, **41**, 435-447, 2000.
- [41] H. Yapıcı, V. Özceyhan, Neutronic analysis of an inertial fusion energy breeder with SiC_f/SiC, *Annals of Nuclear Energy*, **29(12)**, 1389-1401, 2002.
- [42] H. Yapıcı, M. Übeyli Ş. Yalçın, Neutronic analysis of prometheus reactor fueled with various compounds of thorium and uranium, *Annals of Nuclear Energy*, **29(16)**, 1871 – 1889, 2002.
- [43] S. Şahin, Ş. Yalçın, H. M. Şahin, M. Übeyli, Neutronic investigation of a hybrid version of the ARIES-RS fusion reactor, *Annals of Nuclear Energy*, **30(2)**, 245 – 259, 2003.
- [44] L. M. Waganer et al., Inertial fusion energy reactor design studies: Prometheus-L & Prometheus-H, McDonnell Douglas Company Report, MDC 92E0008/DOE/ER-54101, 1992.
- [45] G. Aiello, H. Golfier, J.-F. Maire, Y. Poitevin, J.-F. Salavy, Modeling of SiC_f/SiC composite structures for Nuclear components, *Fusion Engineering and Design*, **51-52**, 73-79, 2000.
- [46] A. Hasegawa, A. Kohyama, R. H. Jones, L. L. Snead, B. Riccardi, P. Fenici, Critical issues and current status of SiC/SiC composites for fusion, *Journal of Nuclear Materials*, **283-287**, 128-137, 2000.
- [47] R. H. Jones, C. H. Henager, Fusion reactor application issues for low activation SiC/SiC composites, *Journal of Nuclear Materials*, **219**, 55-62, 1995.
- [48] A. Kohyama, M. Seki, K. Abe, T. Muroga, H. Matsui, S. Jitsukawa, S. Matsuda, Interactions between fusion materials R&D and other technologies, *Journal of Nuclear Materials*, **283-287**, 20-27, 2000.

- [49] B. Riccardi, P. Fenici, A. Frias Rebelo, L. Giancarli, G. Le Marois, E. Philippe, Status of the European R&D activities on SiC_f/SiC composites for fusion reactors, *Fusion Engineering and Design*, **51-52**, 11, 2000.
- [50] Y. Seki, T. Tabara, I. Aoki, S. Ueda, S. Nishio, R. Kurihara, Impact of low activation materials on fusion reactor design, *Journal of Nuclear Materials*, **258-263**, 1791-1797, 1998.
- [51] J. M. Perlado and J. Sanz, Recent progress on fusion nuclear technology in inertial fusion, *Fusion Engineering and Design*, **42**, 519-535, 1998.
- [52] M. S. Tillack, N. Ghoniem, A. R. Raffray, M. A. Abdou and the Prometheus Team, The Prometheus IFE reactor cavity, DE-AC02-90ER54101.
- [53] N. M. Greene, L. M. Petrie, XSDRNPM, A One-Dimensional Discrete-Ordinates Code For Transport Analysis, NUREG/CR-0200, Revision 5, **2**, Section F3, ORNL/NUREG/CSD-2/V2/R5, Oak Ridge National Laboratory, 1997.
- [54] S. Şahin, *Radiation Shielding Calculations for Fast Reactors (in Turkish)*, Gazi University, Publication # 169, Faculty of Science and Literature, Publication number 22, Ankara, Turkey, 1991.
- [55] W. C. Jordan, S. M. Bowman, Scale Cross-Section Libraries, NUREG/CR-0200, Revision 5, **3**, section M4, ORNL/NUREG/CSD-2/V3/R5, Oak Ridge National Laboratory, 1997.
- [56] N. M. Greene, BONAMI, Resonance Self-Shielding by the Bondarenko Method, NUREG/CR-0200, Revision 5, **2**, section F1, ORNL/NUREG/CSD-2/V2/R5, Oak Ridge National Laboratory, 1997.
- [57] N. M. Greene, L. M. Petrie, R. M. Westfall, NITAWL-II, Scale System Module For Performing Resonance Shielding and Working Library Production, NUREG/CR-0200, Revision 5, **2**, Section F2, ORNL/NUREG/CSD-2/V2/R5, Oak Ridge National Laboratory, 1997.
- [58] N. F. Landers and L. M. Petrie, CSAS, Control Module For Enhanced Criticality Safety Analysis Sequences, NUREG/CR-0200, Revision 5, **1**, Section C4, ORNL/NUREG/CSD-2/V1/R5, Oak Ridge National Laboratory, 1997.
- [59] H. Yapıcı, XSCALC for Interfacing Output of XSDRN to Calculate Integral Neutronic Data, Erciyes University, Kayseri, TURKEY, 2001.